

Friday, April 21, 2017 11:48:58 AM

Page 1

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
--------------------------------	--------------------------	----------------------	---------	--------	--------------	---------------	---------------	------------------	----------------

Draw Nbr	Revision Nbr
D3997	B

0.00

0.00

Memo

Issue P/O: 54065
 Manufacture as per Dwg D3997
 Possible Supplier: Studio Lettrage
 Material release note required

0.00

0.00

Memo

Packaging

0.00

0.00

Memo

Quality Control

DAS
13
9-89

6 APR 26 2017

6x SP17-5-4.

DAS
38
9-8,9

6 MAY 05 2017

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____	DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐	AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐			
Date : _____	Step #: _____	QTY Effective : _____		MRB (QSI042) Approval	
Description Work Order Deviation			Disposition		
			Completed By		
			Lead hand / Supervisor Approval Verification		
			QC / QA Coordinator Approval		
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Mislabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐			
OTHER : _____					

Work Order ID 160133

160133

Page 2

Friday, April 21, 2017 11:48:58 AM

Item ID: D3997-19 Accept ***N900040100*** Setup Start ***NS1***
Revision ID: Stop ***NS2***
Item Name: Placard
Start Date: 4/24/2017 Start Qty: 6.00 ***6*** Cust Item ID:
Required Date: 5/8/2017 Req'd Qty: 6.00 ***6*** Customer:
Reference: SCHEDULED

Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____ Run Start ***NR1***
QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
130	Identify as per dwg & Stock Location: ST 066	0.00				6	0		
130									
Packaging	Memo	0.00							MAY 08 2017
Packaging	***ONE YEAR EXPIRED DATE FROM RECEIVING:***								
	MAY 04 2018								
140	QC21- Final Inspection - Work Order Release	0.00							
140									
QC	Memo	0.00							17/5/17
Quality Control									

MAY 08 2017

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :			MRB (QSI042) Approval 		
Description Work Order Deviation				Disposition					
								Completed By	
								Lead hand / Supervisor Approval Verification	
								QC / QA Coordinator Approval	

Root Cause				FAULT CATEGORY			
Environment ☐	No Re-verification ☐	Pressure/Forced ☐	Temperature/Cure ☐	Power Loss/Surge ☐	Positioned Wrong ☐		
Design ☐	Operator ☐	Bending ☐	Set-up ☐	Folio/Program ☐	Outside Dimensions ☐		
Doc/Data ☐	Offset/Setup ☐	Centre Not Concentric ☐	BOM/Route ☐	Grain ☐	Over/Under tolerance ☐		
Equip/Tooling ☐	Supplier ☐	Cracks ☐	Broken/Damage/Defect ☐	Weld ☐	Part Incorrect ☐		
Handling/Pre ☐	Training ☐	Crimp/Kink/Ripple/Wave ☐	Inspection Incomplete/Unqualified ☐	Wrong Stock Pulled ☐	Part Lost/Missing ☐		
Material ☐	Use for Testing ☐	Cuffs ☐	Contamination ☐	Out of Sequence ☐	Part Moved ☐		
Internal Transport ☐	Poor Information ☐	Crushing ☐	Countersink ☐	Off-set ☐	Drawing ☐		
Tribal Knowledge ☐	Rushing ☐	Heat Treat ☐	Cut Too Short ☐	Mislabeled ☐	Finish ☐		
LOA ☐	Product Improvement ☐	Wave/Twist in Tube ☐	Instructions Incomplete/Unclear ☐	Fit/Function ☐	Misread ☐		
Substation ☐	Process Improvement ☐	Marks/Chatter ☐	Drill Holes ☐	Misaligned/off center ☐	Turning Sequence ☐		
Past Expiry Date ☐	Manufacturing Process ☐	OTHER : _____					
Misidentified ☐	Past Due ☐						

Picklist Print

Friday, April 21, 2017 11:49:05 AM

Page 1

Work Order ID: 160133

160133

Parent Item: D3997-19

D3997-19

Parent Item Name: Placard

Start Date: 4/24/2017

Required Date: 5/8/2017

Start Qty: 6.00

Required Qty: 6.00

Comments: IPP rev A 10.01.12 new issue Prelim EC verified by:DD

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D3997-19P *D3997-19P* Placard		Purchased	No			100	Each	0.0000	1	6			
										**	6x 8075-4		

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE


QA Closed: _____ Date: _____

Work Order update only ☐


Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coor. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :			MRB (QSI042) Approval Completed By _____ Lead hand / Supervisor Approval Verification _____ QC / QA Coordinator Approval _____		
Description Work Order Deviation				Disposition					
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐		Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Misabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐					
		OTHER : _____							

DART AEROSPACE PART NUMBER	JOHN CAMERON AVIATION PART NUMBER
D3997-13	JCA-M47-P7
D3997-15	JCA-M47-P8
D3997-17	JCA-M47-P9
D3997-19	JCA-M47-P10


PART NUMBER	INSTALLATION INSTRUCTIONS
D3997-13	AROUND FUEL PUMP ON/OFF SWITCH
D3997-15	ON BAGGAGE LOCKER OUTER SURFACE BELOW RELEASE BUTTON
D3997-17	ON TANK OUTBOARD SURFACE
D3997-19	AT VENT LINE OUTLET ON AIRCRAFT



D3997-13 PLACARD

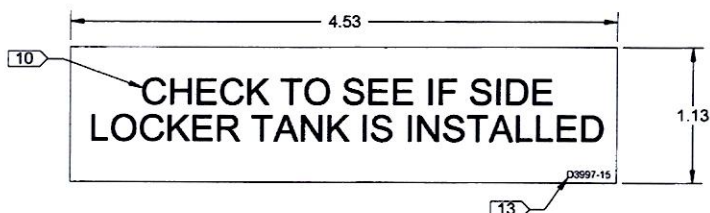

D3997-15 PLACARD

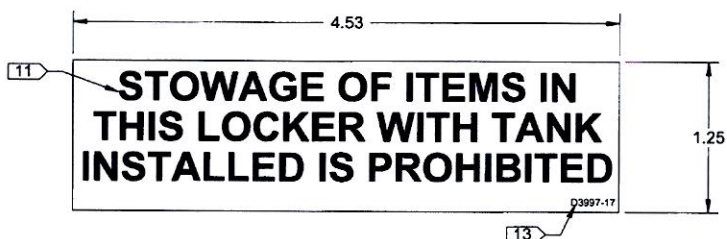

D3997-17 PLACARD



D3997-19 PLACARD

- NOTES:**
- 1) MATERIAL: 3M 7 MIL MASKING FILM #8522CP OR AVERY IPM #2031
 - 2) FINISH: N/A
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: N/A
 - 6) IDENTIFICATION: IDENTIFY AS PER NOTES 8-13 ON SHEET 3
 - 7) WEIGHT: LESS THAN 0.01 LBS
 - 8) 10 PT FONT, WHITE TEXT ON BLACK BACKGROUND
 - 9) 6 PT FONT, WHITE TEXT ON BLACK BACKGROUND
 - 10) 22 PT FONT, BLACK TEXT ON WHITE BACKGROUND
 - 11) 24 PT BOLD FONT, BLACK TEXT ON WHITE BACKGROUND
 - 12) 18 PT BOLD FONT, BLACK TEXT ON WHITE BACKGROUND
 - 13) 6 PT FONT, BLACK TEXT ON WHITE BACKGROUND

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER
NO. 160133465
1704-21

RELEASED
2014-06-11

DESIGN	HS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	ML		
CHECKED	AP	DRAWING NO. D3997	REV. B
MFG. APPR.	JLM		SHEET 3 OF 6
APPROVED	MP	TITLE	SCALE
DE APPR.	DS	PLACARD	NTS
DATE	13.11.05	COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :			MRB (QSI042) Approval 		
Description Work Order Deviation				Disposition					
							Completed By		
							Lead hand / Supervisor Approval Verification		
							QC / QA Coordinator Approval		
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Mislabelled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐							
OTHER : ☐									



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
Tel: 613 632 9577
Fax: 613 632 1053

PURCHASE ORDER

Purchase Order ID PO36065

Purchase Order Date 4/25/2017 10:10:00 AM
PO Print Date 4/26/2017

Page Number 2 of 5

Order From :

VC-STU001

Ship To : DART AEROSPACE LTD

STUDIO DE LETTRAGE 2001
210 MAIN WEST
HAWKESBURY, ON K6A 2H6
CA

1270 ABERDEEN
HAWKESBURY, ON K6A 1K7
CANADA

Contact Name

Vendor Phone

613 632 5449

Ship To Contact

Ship To Phone

Ship Via:

Yours ppd

Ship Acct:

Buyer

Chantal Lavoie

Customer POID

Customer Tax #

10127-2607

Terms

Net 30

Currency

CAD

FOB

EXW - (Ex Works)

4	D3997-5P	Placard	5/3/2017	6.00	\$13.33	\$80.00
			Yes	Each		
			5/3/2017			

AS PER DWG D3997 REV. B
B160135

Line Total: \$80.00

5	D3997-11P	Placard	5/3/2017	6.00	\$13.33	\$80.00
			Yes	Each		
			5/3/2017			

AS PER DWG D3997 REV. B
B160132

Line Total: \$80.00

6	D3997-19P	Placard	5/3/2017	6.00	\$13.33	\$80.00
			Yes	Each		
			5/3/2017			

AS PER DWG D3997 REV. B
B160133

DAS
38
2.89

Line Total: \$80.00

Note:

4/26/2017

210 Main West
Hawkesbury, Ontario K6A 2H6
Canada

INVOICE

Invoice No.: 44187
Date: 05/02/2017
Ship Date:
Page: 1
Re: Order No. 500021

Sold to:

Dart Aerospace Ltd

1270 Aberdeen
Hawkesbury, Ontario
K6A 1K7

Ship to:

Dart Aerospace Ltd

1270 Aberdeen
Hawkesbury, Ontario
K6A 1K7

Quantity	Description	Base Price	Disc %	Unit Price	Amount
12	D3428-1P.	6.67		6.67	80.04
25	D3918-1P.	2.50		2.50	62.50
6	D3997-5P.	13.33		13.33	79.98
6	D3997-11P.	13.33		13.33	79.98
6	D3997-19P.	✓ 13.33		✓ 13.33	79.98
6	D3997-29P.	13.33		13.33	79.98
6	D4086-200P.	13.33		13.33	79.98
12	D4086-220P.	6.67		6.67	80.04
	D4377-1P.	13.33		13.33	
	D4385-1P.	13.33		13.33	
6	D4917-300P.	13.33		13.33	79.98
12	D4917-320P.	6.67		6.67	80.04
PO# 36065 Attn: Chantal					
Subtotal:					782.50
H - HST HST					101.76
SP17-5-4. DAS 38 9-00					
Thank you for your business / Merci de faire affaire avec nous					

Shipped By:	Tracking Number:	HST: 825007651RT0001	Total Amount	884.26
Comment: WO20150			Amount Paid	0.00
Sold By:			Amount Owning	884.26

******CERTIFICATE of CONFORMITY******

Customer:

Studio SL2

Purchase Order N°:

PO # 36065

Packing Slip N°:

WAT

Part N°:

Serial N°:

Description:

Detailed.

Quantity:

12, 25, 6, 6, 6, 12, 6, 12.

Certification:

We hereby certify that:

1. The above listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;
2. All work was accomplished in accordance with the Dart Aerospace Purchase Order;
3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.

Authority:

Avery

APPROVAL:

Valerie Young

DATE:

Signature:

Val Y

May 02.17.

Title:

office administrator

Avery® IPM™ 2031

issued: 01/04/2005

Introduction

Avery® IPM™ 2031 is a high quality pressure-sensitive vinyl film, designed for use on wide format inkjet printers. Avery® IPM™ 2031 has excellent printing properties, allowing crisp print quality with bright and vibrant colours. Avery® IPM™ 2031 offers rapid ink drying and a water-resistant material. It combines good adhesion during its life and easy removal afterwards.

Description

Facefilm: 80-micron premium white calendered, topcoated vinyl.
 Adhesive: removable, acrylic based
 Backing paper: one side coated kraft paper, 140 g/m²

Features

- Excellent printability
- Vibrant and bright colours
- Crisp print quality
- Spray water resistant wit specific pigmented inks
- Good adhesion, excellent removability
- Warranty on outdoor durability

Recommendations for use

A wide variety of full-colour graphics for indoor - and **short/medium term outdoor** applications such as posters, murals, displays, exhibition stands, vehicle graphics etc. Avery® IPM™ 2031 is suitable for application to a wide variety of substrates and will remove cleanly for up to 1 year after application.

IPM media should be handled with care as any surface contamination may affect the print quality. Media should be processed in an environment of 15-25°C and 30-70% relative humidity. After drying, the finished prints should be wrapped in polyethylene film and despatched flat or rolled with the printed side facing outwards. To protect prints against water, UV/light and abrasion, overlamination with a clear film is recommended. For specific details of Avery® DOL combinations, refer to "[Technical Bulletin 5.3. Recommended combinations of Avery® Overlaminates and Avery® Digital Print Media](#)".

Always test your combination of Avery® IPM™ medium, inkjet printer and inks prior to commercial use.

Compatibility

Avery® IPM™ 2031 is compatible with a broad selection of inkjet printers, when printing with pigmented, water based inks. For specific details refer to "[Technical Bulletin 5.6 Avery Dennison Inkjet Print Media - Printer compatibility](#)".

Durability:

Avery® IPM™ 2031 is warranted for outdoor use in conjunction with pigmented outdoor inks from HP, Encad and Colorspan. The warranted period varies from type of application and type of overlaminate from 18 months up to 5 years. For full details, see our Avery® IPM™ Outdoor warranty.



Physical properties

Features	Test method ¹	Results
Caliper, facefilm	ISO 534	80 µm
Gloss	ISO 2813, 20°	1%
Dimensional stability	DIN 30646	0.3 mm. max
Adhesion, initial	FINAT FTM-1, stainless steel	180 N/m
Adhesion, ultimate	FINAT FTM-1, stainless steel	260 N/m
Flammability		Self extinguishing
Accelerating ageing	DIN 53587, 500h exposure	No negative impact on film Performance
Shelf life	Stored at 22° C/50-55 % RH	2 years
Removability		up to 1 year
Not when applied to: Nitro-cellulose paints, ABS, Polystyrene, certain types of PVC		
Durability ²	Overlaminated with DOL 4300	5 years
	Overlaminated with DOL 1000, DOL 1100 with overlaps	3 years
	Overlaminated without overlaps for static applications only	2 years
	Without overlaminate and used for static, Non-abrasive application ONLY	18 months

Only when printed with ENCAD GO, HP and Colorspan pigmented inks and when properly applied in accordance with our application instructions. Only applicable for vertical exposure.

Temperature range

Features	Results
Application temperature	Minimum: +10°C
Service temperature	-20°C to +80°C

Important

Information on physical and chemical characteristics is based upon tests we believe to be reliable. The values listed herein are typical values and are not for use in specifications. They are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material to their specific use. All technical data are subject to change. In case of any ambiguities or differences between the English and foreign versions of these Conditions, the English version shall be controlling.

Warranty

Avery® branded materials are manufactured under careful quality control and are warranted to be free from defect in material and workmanship. Any material shown to our satisfaction to be defective at the time of sale will be replaced without charge. Our aggregate liability to the purchaser shall in no circumstances exceed the cost of the defective materials supplied. No salesman, representative or agent is authorised to give any guarantee, warranty, or make any representation contrary to the foregoing. All Avery® branded materials are sold subject to the above conditions, being part of our standard conditions of sale, a copy of which is available on request.

1) Test methods

More information about our test methods can be found on our website.

2) Durability

The durability is based on middle European exposure conditions. Actual performance life will depend on substrate preparation, exposure conditions and maintenance of the marking. For instance, in the case of signs facing south; in areas of long high temperature exposure such as southern European countries; in industrially polluted areas or high altitudes, exterior performance will be decreased.

